




Principles of Computer Science I

Prof. Nadeem Abdul Hamid
CSC 120A - Fall 2004
Lecture Unit 4



Layers of a Computing System

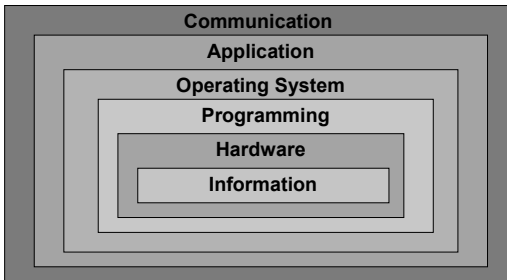


Storing and Using Data

- Computers must deal with many types of data
 - Numbers
 - Text
 - Audio
 - Images and graphics
 - Video
- Computers are finite
 - Must balance computational limits vs. our perception of sight and sound


Representing Information

- **Analog data**
 - a continuous representation, analogous to the actual information it represents
- **Digital data**
 - a discrete representation, breaking the information up into separate elements




- A mercury thermometer is an analog device- the mercury rises in a continuous flow in the tube in direct proportion to the temperature
- Computers do not work well with analog data- we must *digitize* by breaking range of values into pieces

Electronic Signals



An analog and a digital signal



Degradation of analog and digital signals

Binary Representation

- Devices that store and manage data are less expensive and more reliable if they only have to represent one of two possible values
- One bit can represent two possibilities (0 or 1)
- N bits can represent 2^N possibilities
- Integers (we've discussed already)
 - Base-2 numbers
 - Two's complement notation
 - Overflow

Representing Real Numbers

- “Floating point” notation
 - Number of digits fixed but radix point floats
 - Formula: $sign * mantissa * 10^{exp}$ (base-10)

Real value	Floating point
12001.00	+12001 * 10 ⁰
-120.01	- 12001 * 10 ⁻²
0.12000	+12000 * 10 ⁻⁵
-123.10	- 12310 * 10 ⁻²
15555000.00	+15555 * 10 ⁴

- Binary floating point uses 2^{exp}

Representing Text

- Use a character set: list of characters and codes to represent each one
- ASCII (American Standard Code for Information Interchange)
 - Originally used seven bits to represent each character, allowing for ??? unique characters
 - Later evolved so that all eight bits were used which allows for ??? characters

ASCII Character Set

Left Digit	Right Digit(s)	ASCII									
		0	1	2	3	4	5	6	7	8	9
0		NUL	SOH	STX	ETX	EOT	ENQ	ACK	BEL	BS	HT
1		LF	VT	FF	CR	SO	SI	DLE	DC1	DC2	DC3
2		DC4	NAK	SYN	ETB	CAN	EM	SUB	ESC	FS	GS
3		RS	US	□	!	"	#	\$	%	&	'
4		[]	*	+	,	-	.	/	0	1
5		2	3	4	5	6	7	8	9	:	;
6		<	=	>	?	@	A	B	C	D	E
7		F	G	H	I	J	K	L	M	N	O
8		P	Q	R	S	T	U	V	W	X	Y
9		Z	[\]	^	_	`	a	b	c
10		d	e	f	g	h	i	j	k	l	m
11		n	o	p	q	r	s	t	u	v	w
12		x	y	z	{		}	~	DEL		

Unicode Character Set

- Uses 16 bits per character
 - Can represent 2^{16} , or over 65 thousand, characters
- Designed to be a superset of ASCII
 - First 256 characters correspond to ASCII

Code (Hex)	Character	Source
0041	A	English (Latin)
042F	Я	Russian (Cyrillic)
0E09	๙	Thai
13EA	Ꮖ	Cherokee
211E	℞	Letterlike Symbols
21CC	⇌	Arrows
282F	⠆	Braille
345F	한	Chinese/Japanese/ Korean (Common)

10

Data Compression

- Reducing the amount of space (bits and bytes) needed to store a piece of data
- Compression ratio
 - size of the compressed data divided by the size of the original data
- Lossless: data can be retrieved without losing any of the original information
- Lossy: some information is lost in the process of compaction
- Common techniques
 - keyword encoding
 - run-length encoding
 - Huffman encoding

CSC 120A - Berry College - Fall 2004

11

Keyword Encoding

- Frequently used words replaced with a single character
- Characters used to encode cannot be part of the original text

Word	Symbol
as	^
the	~
and	+
that	\$
must	&
well	%
those	#

CSC 120A - Berry College - Fall 2004

12

Run-Length Encoding

- Single character may be repeated over and over again in a long sequence
 - Not in English text, but often occurs in large binary data streams
- Sequence of repeated characters is replaced by
 - a *flag character*,
 - the repeated character,
 - a single digit indicating how many times the character is repeated.

RLE Example

- AAAAAAA would be encoded as: *A7
- *n5*x9ccc*h6 some other text *k8eee would be decoded into the following original text:
nnnnnnxxxxxxxxccchhhhhh some other text kkkkkkkkkee
 - Original text: 51 characters
 - Encoded string: 35 characters
 - Compression ratio of 35/51 (approximately 0.68)
- Can we encode repetition lengths greater than 9?

Huffman Encoding

- Why should the character "X", seldom used in text, take up the same number of bits as the blank, used very frequently?
- Huffman codes using variable-length bit strings to represent each character
 - Few characters may be represented by five bits, another few by six bits, yet another few by seven bits, and so on...

Huffman Code Example

Huffman Code	Character
00	A
01	E
100	L
110	O
111	R
1010	B
1011	D

- DOORBELL would be encoded as:
1011110110111101001100100


Huffman Encoding (cont.)

- Using fixed-size bit string to represent each character (say, 8 bits), the binary form of the original string would be 64 bits
- Huffman encoding is 25 bits long
- Compression ratio of 25/64 (approximately 0.39)
- Important characteristic
 - no bit string used to represent a character is the prefix of any other bit string used to represent a character
- To generate codes, figure out frequencies...


Representing Audio

- We perceive sound when a series of air compressions vibrate a membrane in our ear
- Stereo sends an electrical signal to a speaker to produce sound
 - Signal is analog representation of sound wave
 - Voltage in signal varies in direct proportion to the sound wave
- Digitizing the signal: *sampling*
 - Periodically measure voltage of signal and record appropriate numeric value
 - Sampling rate of around 40,000 times/second enough to create reasonable sound reproduction

Sampling (in general)

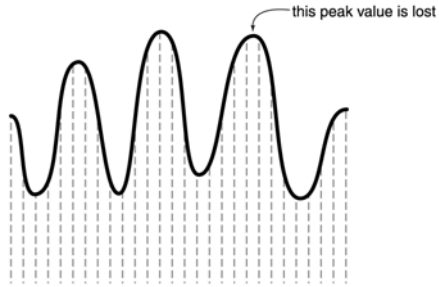

Storing Audio on a CD



- Surface of the compact disk (CD) has microscopic pits to represent binary digits
- Low intensity laser pointed at the disk
- Laser light reflects strongly if surface is smooth; reflects poorly if surface is pitted


Audio Formats

- Popular formats: WAV, AU, AIFF, RA, MP3
- Currently dominant format for compressing audio data is MP3
- MP3 uses both lossy and lossless compression
 - Analyzes the frequency spread and compares it to mathematical models of human psychoacoustics (the study of the interrelation between the ear and the brain)
 - Discards information that can't be heard by humans
 - Bit stream is then compressed using form of Huffman encoding

Representing Images and Graphics

- Color is our perception of various frequencies of light reaching our retinas
- Three types of color photoreceptor cone cells in the retina
 - Respond to different sets of frequencies
 - Correspond to the colors of red, green, and blue
- Color on a computer: RGB value (three numbers indicating relative contribution of each primary color)
- (255, 255, 0) maximizes contribution of red and green, and minimizes contribution of blue; results in a bright yellow

Color Cube

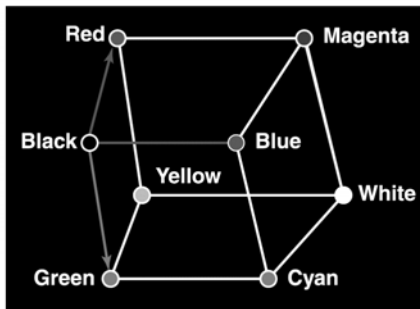

RGB Values


RGB Value			Actual Color
Red	Green	Blue	
0	0	0	black
255	255	255	white
255	255	0	yellow
255	130	255	pink
146	81	0	brown
157	95	82	purple
140	0	0	maroon

Color Depth

- Amount of data used to represent a color
- *HiColor* indicates a 16-bit color depth
 - Five bits used for each number in RGB value and extra bit sometimes used for transparency
- *TrueColor* indicates a 24-bit color depth
 - Each number in RGB value gets eight bits
- More bits used for RGB values = more different colors can be represented

Indexed Color

- Particular application may support only a certain number of specific colors
 - Creates a palette from which to choose
 - *E.g., Netscape Navigator's color palette:*



Digitizing Images and Graphics

- We can digitize an image by representing it as a matrix of dots, called pixels
- Each pixel stores an RGB value
- The number of pixels used is called the resolution
- This method of representing an image (on a pixel-by-pixel basis) is called raster graphics format
- Common raster file formats
 - BMP (Windows bitmap), GIF, JPEG

Vector Graphics

- An alternative to raster graphics format
- Describe an image in terms of lines and geometric shapes
 - Define shapes using mathematical functions
 - Specify line directions, colors, thicknesses, *etc.*
- Files can be smaller in size because we don't specify every pixel in the image
- Can be resized (mathematically) without distortion
- But not really suitable for real-world images

Representing Video

- Video is a series of images
 - 30 or 60 frames per second, for example
 - Huge amount of data in uncompressed form
- Not feasible to represent without compression
- A video codec (COmpressor/DECompressor) refers to methods used to shrink the size of a movie
- Almost all video codecs use lossy compression to minimize the huge amounts of data associated with video
- Types of compression
 - Temporal compression: looks for differences between consecutive frames (don't store repeated information)
 - Spatial compression: removes redundant information within a frame (compress individual images)
